

## TLS PCLINK™ THERMAL LABELLING SYSTEM

**Make the connection to more powerful labeling options with the TLS-PC Link™ Printer.**



The TLS-PC Link™ Thermal Labeling System is a rugged portable/desktop solution. Use the power of your PC for more versatile labeling options.

### Versatile label options


Uses all of the available TLS 2200 printer materials and ribbons, including bulk roll material.

### Easy-to-use label design software

Brady LabelMark™ Labeling Software is included with your TLS-PC Link, and BradySoft™ 8 Label Design Software is also available for use with this system.

### Windows™ driver included

This driver allows you to easily print labels from either Brady labelling software solution.

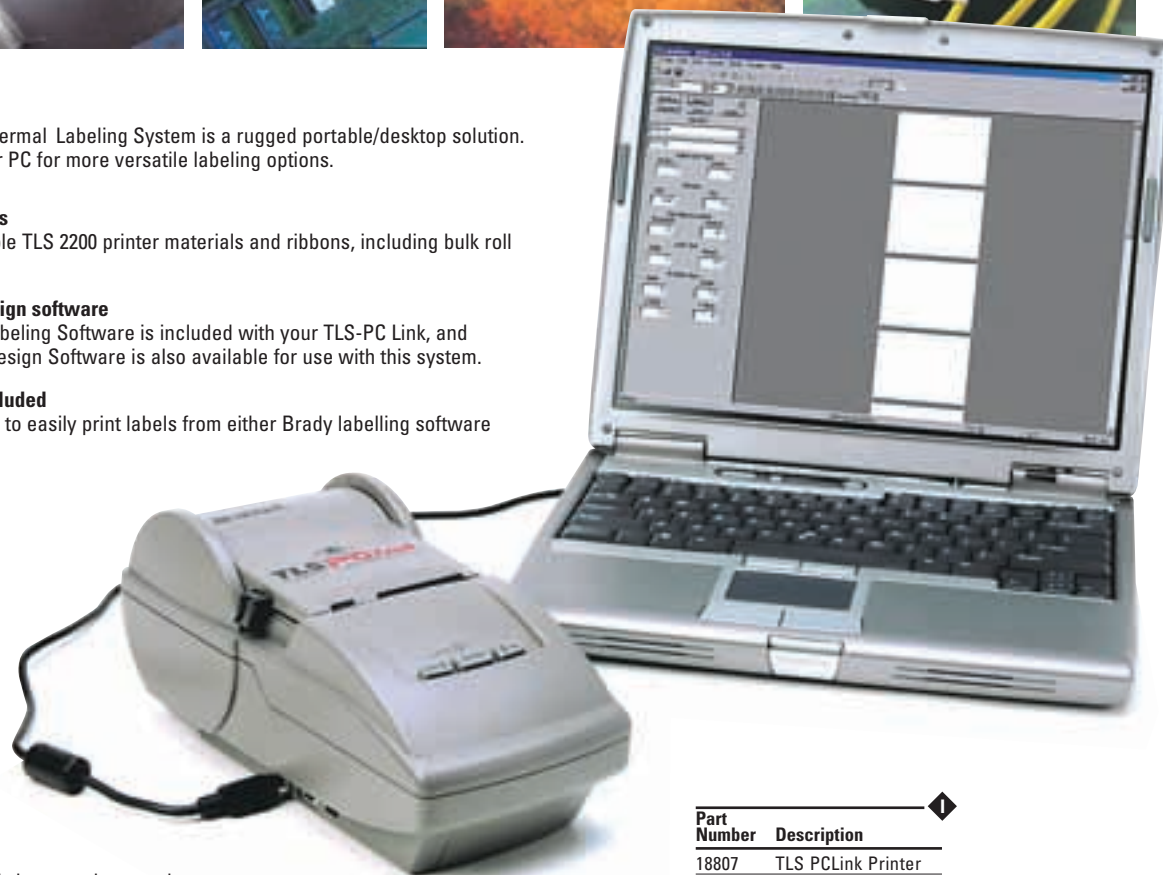

- Prints over 500 labels between battery charges
- Weight 1.14 kg
- Thermal Transfer print mechanism 203 dpi (8 dots/mm)
- Labels up to 2" wide (50.8 mm)
- Print length up to 6" (152.4 mm)
- FCC Class A approved
- Adjustable for 6 different widths of labels
- Built-in industrial label cutter
- Custom TrueType font
- Print width 48 mm
- Operating temperature range: 4°C to 49°C
- UL and CUL listed AC adapter/battery charger

Part Number	Description
18807	TLS PCLink Printer

Printer system includes LabelMark™ Labelling Software, rechargeable battery pack, power supply/battery charger, R6210 ribbon, sample labels (PTL-19-423), Quick Start Guide, manual, communications cable, and Windows drivers.

